


18" x 26" Good

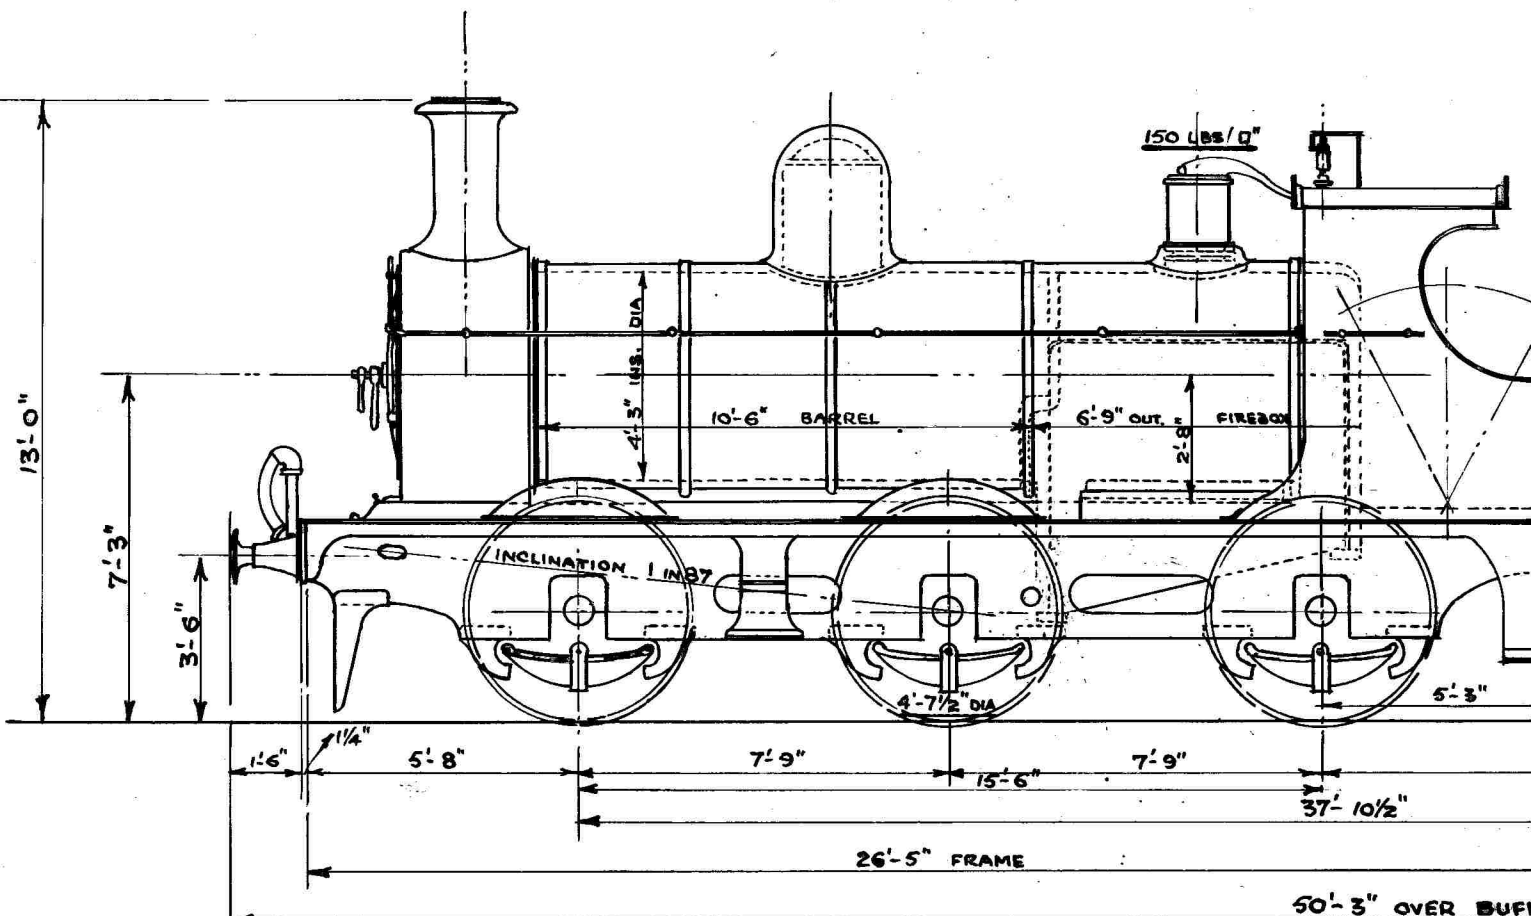

	5'-8"	7'-9"	15'-6"	7'-9"	37'-10 1/2"
	26'-5" FRAME				
	50'-3" OVER BUFF				
LOADED	13-2-0	13-4-0	13-4-0	12-4-0	
LIGHT	11-13-2	12-15-3	12-15-3	11-2-0	
	ENGINE LOADED		38-10-0		
	" LIGHT		35-11-1		

TOTAL WEIGHT L
" " L


CYLINDERS (2 INSIDE) 18" DIA x 26" STROKE				
FIREBOX HEATING SURFACE	105 SQ. FT.	WORKING PRESSURE	150 LBS/SQ"	WIDTH OVER
TUBES	1,029 " "	208 TUBES	1 3/4" EXT. DIA.	WATER CAP
TOTAL	1,134 " "	No. IN CLASS	12	COAL
GRATE AREA	20.5 " "	ENGINE NOS.	{ 7 TO 18 F.R. 12468 TO 12479 LMS.	TRACTIVE F

GOODS ENGINES

No. 7 to 12. BUILT BY NASMYTH WILSON & CO. 1899.

" 13 to 18 " " SHARP, STEWART & CO 1899.

8

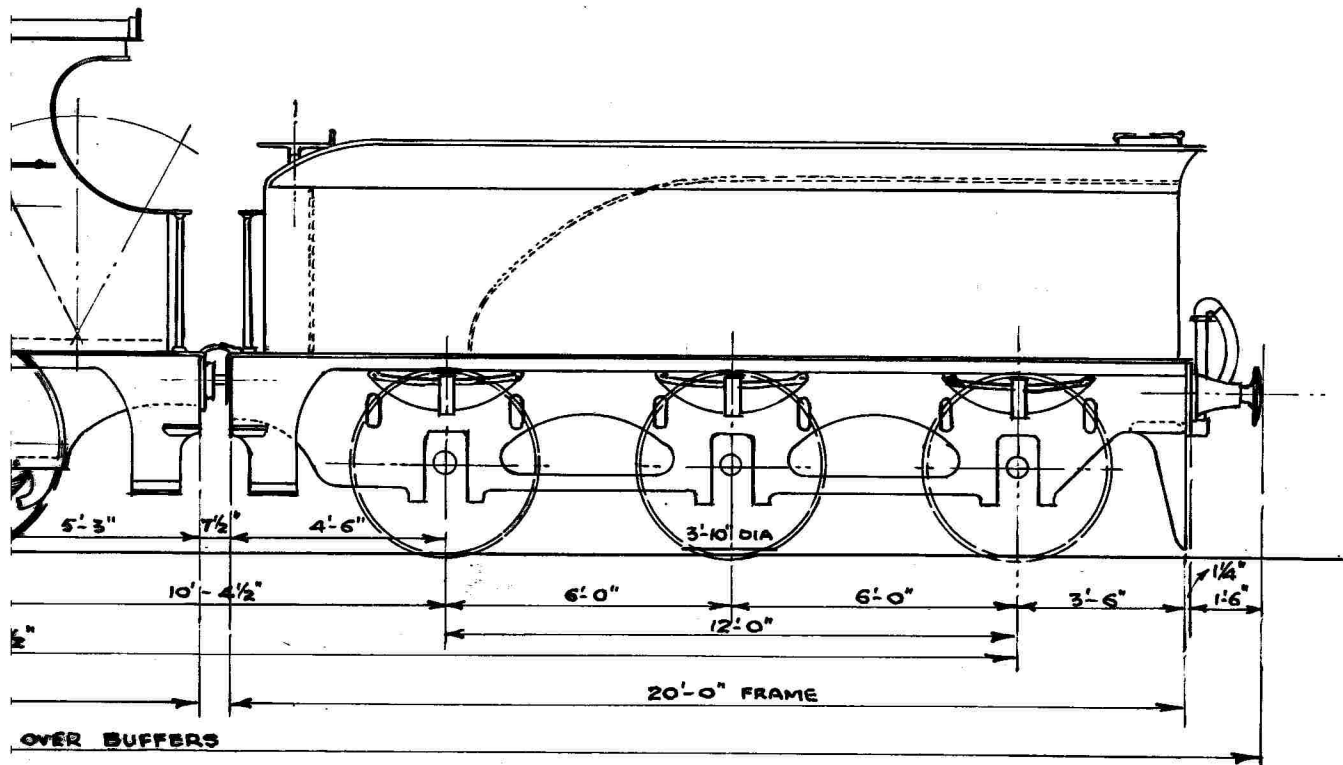

	10-2-0	8-3-0	10-0-0
	6-0-2	5-10-1	4-14-2

TENDER LOADED 28-5-0
 " LIGHT 16-5-1

HEIGHT LOADED	T. C. Q
	66 - 15 - 0
" LIGHT	51 - 16 - 2

ADHESION @ 450 LBS/TON	17,325 LBS.
" " 600 " "	23,100 "
MAX. ROLLING LOAD ON 30' SPAN	24.8 TONS
" LOAD PER FT. RUN OVER BUFFERS	1.33 "
" " " " " WHEELBASE	1.76 "
" " " " " ENG "	2.48 "

WIDTH OVER FOOTPLATE	7'-6"
WATER CAPACITY	2,500 GALLS
WEIGHT	3 TONS 10 CWT.
ACTIVE EFFORT	19,352 LBS.